

TP 90 Spotlight Cord

Flexible
Double insulated
90°C
300/500 V


Application

Suitable for spotlight installations with higher operational temperatures. 2 x 1.5 mm² also available in halogenfree version (see table).



Construction

Conductor	Stranded Plain Cu class 2
O.D.	See table
Insulation	Halogenfree compound
Outer Jacket	White PVC
Weight	See table

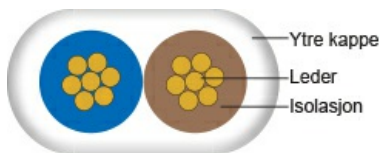

Specifications

Operating temperature	0 – +90 [°C]
Temperature @ installation	+5 [°C]
Operating voltage	300/500 [V]

Norms

Design and testing standards	CENELEC HD 21.5, CENELEC HD 22.1 (EI5), IEC 60502-1
Flame retardant	IEC 60332-1
Euroclass	Eca
DoP No.:	TJ-1001-CPR-2017



Core (mm ²)	O.D. (mm)	Weight (kg/km)	P-no.
2 x 1.5	4,6 / 7,6	62	1052463
2 x 2.5	5,5 / 9,0	91	1052462
3 x 1.5	8,1	78	1052461
Halogenfree			
2 x 1.5	4,6 / 7,6	62	1052464